





Technical Product Specifications

Primary Installation Scenarios — Installs 4 Ways

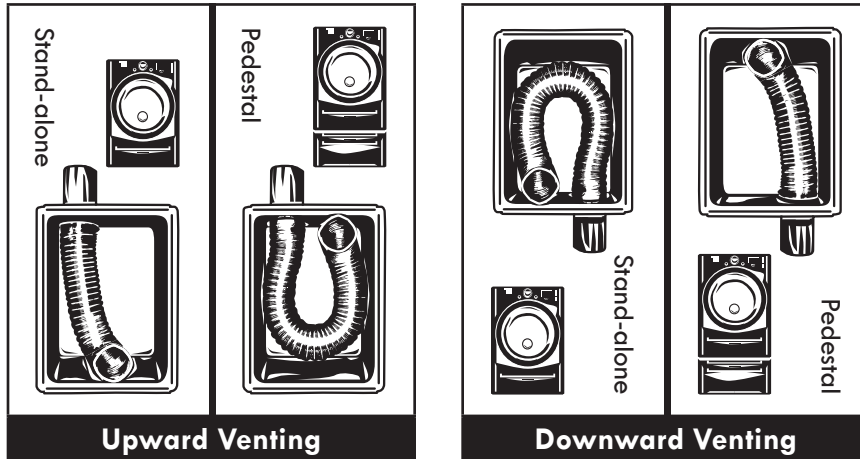

Upward Venting

Downward Venting

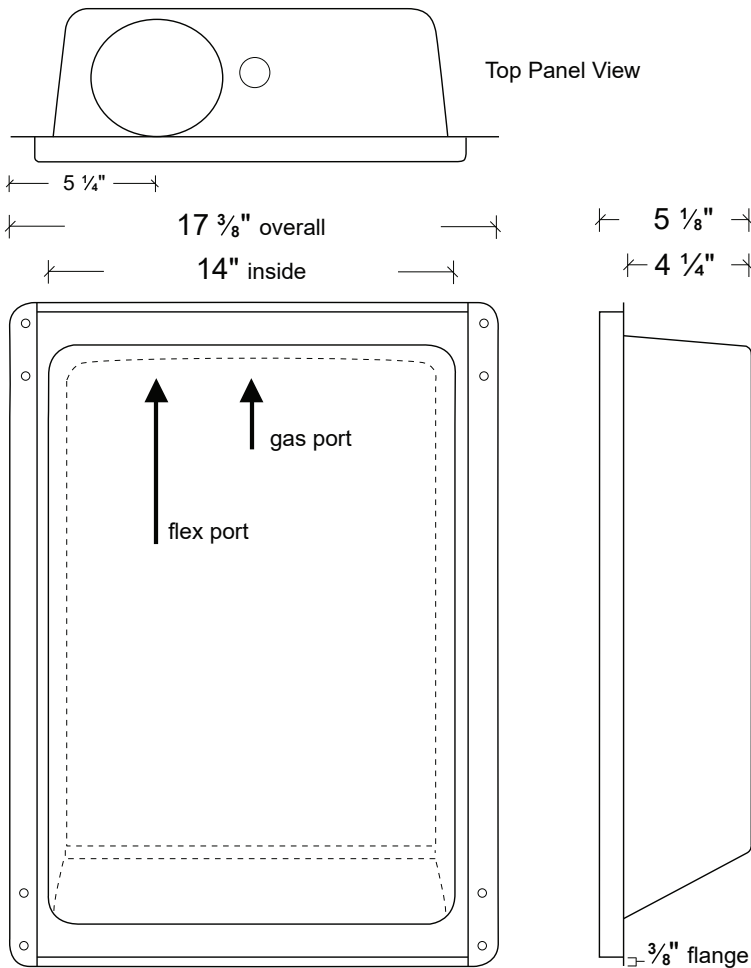

Model	Applications
DB-480	Installs in 2X6 (or 2X4 walls with furring strip) for venting up or down with a larger receiving area to accommodate pedestal and stand-alone dryers.

Performance Data

- For Use:**
- Dryer vent hose receptacle
 - Doubles as gas connection receptacle
 - Meets code requirements as a clean-out

Material:

- Deep drawn 22 gauge Aluminized Steel (.028")

US Patents 6,419,102 and 7,731,045

General Information

- Benefits:**
- Locate the dryer right up against the wall
 - Flex is protected from getting crushed
 - Lint build-up is minimized
 - Standard installation on the bottom plate every time
 - Cleaner, more professional looking finish
 - Efficiency is increased...clothes dry faster
 - Laundry room appears larger to prospects
 - Reduces the fire hazard
 - Reduces mold potential in the wall

- Features:**
- Accommodates pedestal and stand-alone dryers
 - No trim-ring piece is needed
 - Elbow eliminator...gain 5 foot of duct run
 - Surface is paintable, no masking needed

Manufactured By

In-O-Vate Technologies, Inc.
 250 S. Central Blvd. Suite 207
 Jupiter, FL 33458
 Telephone: 561-743-8696
 Facsimile: 561-745-9723
www.Dryerbox.com